

# 方形 33Ah 纳米钛酸锂动力电池规格书

SPECIFICATION of PRESMATIC 33Ah-LITHIUM TITANATE POWER BATTERY

(型号: LTO2717397 /33Ah)

Document No. 文件编号	Version 版本/次	Department 拟案单位	Valid Date 生效日期
SJ0000090143	A/1	电池研究院	2023.11.24
Design 编制	Check 审核		Approval 批准
郭旭	马美品		詹世英

Customer Approval 客户确认	Signature/Date 签字/日期	
	Company Name 公司名称	
	Company Stamp 公司印章	

公司名称: 格力钛新能源股份有限公司 公司地址: 珠海市金湾区三灶镇金湖路 16 号 电话: +86-0756-7637666 传真: +86-0756-7637666 网址: <a href="http://www.zhyle.com">http://www.zhyle.com</a>	Company: GREE Altairnano New Energy Inc. Address: No. 16, Jinhu Road, Sanzao Town, Jinwan District, Zhuhai, China. Tel No.: +86-0756-7637666 Fax No.: +86-0756-7637666 Web: <a href="http://www.zhyle.com">http://www.zhyle.com</a>
--	---



## 目录

## Contents

1. 适用范围 Scope .....	1
2. 概述 Description.....	1
2.1 命名规则 Naming Rules .....	1
2.2 电池构成 Cell Component.....	2
2.3 引用标准 Adopted Standard.....	2
3. 电池性能测试条件 Test Conditions of Cell Properties.....	2
3.1 标准测试条件 Standard Test Conditions .....	2
3.2 测量器具及设备 Measuring Instruments or Apparatus .....	3
4. 技术规格 Specification .....	3
4.1 单体电池基本参数 Cell Specification .....	3
4.2 单体电池电化学性能参数 Cell Electrochemical Performance .....	5
5. 单体电池可靠性测试 Cell Reliability Test.....	7
6. 电池操作注意事项及危险警告 Danger Warning and Caution in Handling the Cell.....	9
6.1 电池操作注意事项 Recommending Usage.....	9
6.2 危险警告 Hazard Warning .....	10
7. 保质期及产品责任 Period of Warranty and Product Liability.....	12
8. 贮存 Storage.....	12
9. 运输注意事项 Shipment Requirement .....	12
10. 其它化学反应 Other Chemical Reactions .....	12
11. 电池结构示意图 Scheme of the Cell Structure .....	12
12. 备注 Remark.....	13

## 1. 适用范围 Scope

本规格书描述纳米钛酸锂电池之基本参数、电化学特性、可靠性及其试验和判定标准、使用说明、安全规程、质量评定及包装、贮存和运输等，适用于格力钛新能源股份有限公司制造的 LTO2717397/33Ah 纳米钛酸锂电池。

This specification describes the lithium titanate cell's basic parameters, electrochemical characteristics, reliability and its test method, decision criteria, instructions, safety procedures, quality evaluation, packaging, storage, and transportation, etc. The specification is applied to the LTO2717397/33Ah lithium ion battery manufactured by GREE Altairnano New Energy Inc.


## 2. 概述 Description

产品型号： LTO2717397/33Ah 纳米钛酸锂动力电池。

Product model: LTO2717397/33Ah Lithium Titanate Power Cell.

### 2.1 命名规则 Naming Rules

LTO 27 173 97 / 33Ah

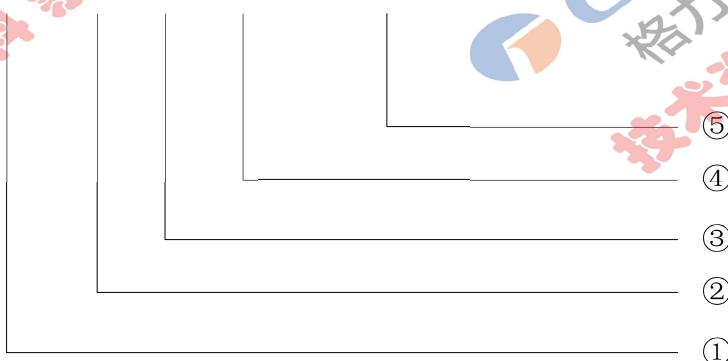

- ① 代表电芯采用的负极材料为钛酸锂。

Indicates the anode material of battery, the letter "LTO" defines Lithium Titanate.

- ② 代表电池厚度 (mm)。

Indicates the thickness of battery (mm).

- ③ 代表电池宽度 (mm)。

Indicates the width of battery (mm).

- ④ 代表电池高度(mm)，用三位数字表示。

Indicates the overall height of battery (mm) in three digits.

- ⑤ 代表电池容量。

Indicates the capacity of battery.



## 2.2 电池构成 Cell Component

本电池为纳米钛酸锂电池，由正极、负极（钛酸锂）、隔膜、电解液和铝制金属外壳等组成。

This cell is of nano lithium titanate cell which is composed of negative and positive electrode, separator, electrolyte and metal case etc.

## 2.3 引用标准 Adopted Standard

GB/T 31484-2015 电动汽车用动力蓄电池循环寿命要求及试验方法

GB/T 31484-2015 Cycle life requirements and test methods for traction cell of electric vehicle

GB/T 31486-2015 电动汽车用动力蓄电池电性能要求及试验方法

GB/T 31486-2015 Electrical performance requirements and test methods for traction cell of electric vehicle

GB 38031-2020 电动汽车用动力蓄电池安全要求

GB 38031-2020 Electric vehicles traction battery safety requirements

Q/GRT 1.02.001—2022 纳米钛酸锂电池

Q/GRT 1.02.001—2022 Nano lithium titanate rechargeable cell

## 3. 电池性能测试条件 Test Conditions of Cell Properties

### 3.1 标准测试条件 Standard Test Conditions

#### 3.1.1 标准测试环境 Standard Test Environment

除非有其他特殊说明，本规格书中所有测试都在以下环境条件进行：

Unless otherwise specified, all tests stated in this Product Specification are conducted at below condition:

温度：25 ± 5 °C；

Temperature: 25 ± 5 °C；

相对湿度：15%~90%；

Humidity: 15%~90%；

大气压力：86kPa~106kPa；

Atmospheric pressure: 86kPa~106kPa.

海拔：≤4000m。

Height above sea level: ≤4000m.

本规格书所提到的室温是指 25°C±5°C。

The room temperature mentioned in this product specification is 25°C±5°C.

#### 3.1.2 标准充电方式 Standard Charge Method

在标准环境条件下，以  $1I_1$ (33A) 电流恒流充电至充电截止电压，停止充电。

Under standard test environment, a cell is charged to the standard charge cut-off voltage at a constant current of  $1I_1$  (33A), then stopped charging.

#### 3.1.3 标准放电方式 Standard Discharge Method

在标准环境条件下，以  $1I_1$ (33A) 电流恒流放电至放电截止电压，停止放电。

Under standard test environment, a cell is discharged to the standard discharge cut-off voltage at a constant current of  $1I_1$  (33A), then stopped discharging.

### 3.1.4 初始容量 Initial Capacity

新出厂的电池, 在室温下, 完全充电后, 以  $1I_1$  (33A) 电流恒流放电至放电截至电压时所放出的容量(Ah)。

Under standard test environment, a fresh cell is charged in accordance with 3.1.2, and then discharged to the standard discharge cut-off voltage at a constant current of  $1I_1$  (33A), the discharge capacity is defined to be initial capacity.

## 3.2 测量器具及设备 Measuring Instruments or Apparatus

### 3.2.1 尺寸测量设备 Dimension Measuring Instrument

测量尺寸的仪器精度应不小于 0.01mm。

Dimension measurement shall be implemented by instruments which accuracy should not be less than 0.01 mm.

### 3.2.2 电压表 Voltmeter

国家标准或更灵敏等级, 内阻不小于 10 k $\Omega$ /V。

Standard class specified in the national standard or more sensitive class with inner impedance not less than 10 k $\Omega$ /V.

### 3.2.3 电流表 Ammeter

国家标准或更灵敏等级, 外部总体内阻包括电流表和导线应小于 0.01 $\Omega$ 。

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01 $\Omega$ .

### 3.2.4 内阻测试仪 Impedance Meter

内阻测试仪测试方法为交流阻抗法(AC 1kHz LCR)。

Impedance shall be measured by a sinusoidal alternating current method (AC 1kHz LCR meter).

## 4. 技术规格 Specification

### 4.1 单体电池基本参数 Cell Specification

序号 No.	项目 Item	参数 Parameters	备注 Remark
1	外观 Appearance	符合外观检验标准 Accord with appearance inspection standard	电池外观应无划伤、破裂、污渍、生锈漏液等影响市场价值的缺陷。 There should be no such defects as flaw, crack, rust, leakage, which may depreciate the commercial value of cell.
2	额定容量 Rated Capacity	33Ah	25 $\pm$ 5 $^{\circ}$ C

3	标称电压 Nominal Voltage	2.3V	/
4	内阻 Internal Impedance	$\leq 0.5m\Omega$	50%荷电状态下用交流法测量内阻 Internal resistance measured at AC 1kHz after 50% charged.
5	标准充电截止电压 Standard Charge Cut-off Voltage	2.9V	/
6	标准放电截止电压 Standard Discharge Cut-off Voltage	1.5V	/
7	最大持续充电电流 Maximum Continuous Charge Current	264A	25±5 °C
8	最大持续放电电流 Maximum Continuous Discharge Current	264A	25±5 °C
9	最大脉冲充/放电电流 (60s) Maximum Pulse Charge/Discharge Current (60s)	429A	25±5 °C
10	工作温度范围 Operating Temperature Range	温度: -40~55°C 相对湿度: $\leq 85\%$ Temperature: -40~55°C Humidity: $\leq 85\%RH$	当电池温度低于 0°C时, 建议充/放电电流 $\leq 1 I_1$ (33A) Recommended charge/discharge current $\leq 1 I_1$ (33A), when cell temperature is lower than 0 °C.
11	储存温度范围 Storage Temperature Range	-20°C~45°C	推荐 Recommend (25±5 °C); $\leq 90\%RH$ 储存湿度范围。 $\leq 90\%RH$ storage moisture range.
12	尺寸 Dimension	厚度: 27.8 <sup>+1.0</sup> mm 宽度: 173.0 <sup>+1.0</sup> mm 高度: 97.0 <sup>+1.0</sup> mm Thickness: 27.8 <sup>+1.0</sup> mm Width: 173.0 <sup>+1.0</sup> mm Height: 97.0 <sup>+1.0</sup> mm	① 电池详细尺寸, 请参看本规格书“11.电池结构示意图”。 The detailed dimension can be found in "11. Scheme of the cell structure" of this specification. ② 测试厚度时需加压: 压力 2000~2500N。 Using 2000~2500N pressure When test the thickness of battery

13	重量 Weight	1040±30g	
14	建议 SOC 使用范围 Recommended SOC using range	10%~90%	
15	电芯出货 SOC Cell sale SOC	50±3%	
16	电芯保护温度 Cell protection temperature	55℃	

#### 4.2 单体电池电化学性能参数 Cell Electrochemical Performance

序号 No.	项目 Item	测试方法 Test Method	标准 Criteria
1	循环寿命 Cycle Life	<p>在标准测试环境下，电池按 3.1.2 规定充电，搁置 30 分钟，而后按 3.1.3 规定放电，搁置 30 分钟，再进行下一个充放电循环，连续进行充放电循环 25000 次。</p> <p>Under standard test environment, a cell is charged in accordance with 3.1.2, rest 30 minutes, and then discharged in accordance with 3.1.2, rest 30 minutes prior to next charge-discharge cycle. The cell shall be continuously charged and discharged for 25000 cycles.</p>	<p>25000 次循环后，放电容量 ≥ 80% * 初始容量</p> <p>Discharge Capacity ≥ 80% * initial capacity after 25000 cycles</p>
2	倍率充电性能 Rate Charge Performance	<p>在标准测试环境下，电池按 3.1.3 规定放电，搁置 10 分钟，而后以 264A 电流充电至标准充电截止电压，计算充电容量 (Ah) 与初始容量的比值(%)。</p> <p>Under standard test environment, a cell is discharged in accordance with 3.1.3, rest 10 minutes, and then charged to standard cut-off voltage at a constant current of 264A. Calculate the ratio of charge capacity and initial capacity (%).</p>	<p>264A 充电容量 ≥ 90% * 初始容量</p> <p>Charge capacity ≥ 90% * initial capacity with 264A</p>
3	倍率放电性能 Rate Discharge Performance	<p>在标准测试环境下，电池按 3.1.2 规定充电，搁置 10 分钟，而后以 264A 电流放电至标准放电截止电压，计算放电容量 (Ah) 与初始容量的比值(%)。</p> <p>Under standard test environment, a cell is charged in accordance with 3.1.2, rest 10 minutes, and then discharged to standard cut-off voltage at a constant current of 264A. Calculate the ratio of discharge capacity and initial capacity (%).</p>	<p>264A 放电容量 ≥ 90% * 初始容量</p> <p>Discharge capacity ≥ 90% * initial capacity with 264A</p>



4	低温充电性能 Low Temperature Charge Performance	<p>电池按 3.1.3 规定放电结束后：</p> <p>1.将电池放入-20 ±2℃恒温环境中搁置 24±0.2h，然后以 1I<sub>1</sub> (33A)电流充电至标准充电截止电压，计算充电容量 (Ah) 与初始容量的比值(%)。</p> <p>2. 将电池放入-40 ±2℃恒温环境中搁置 24±0.2h，然后以 0.5I<sub>1</sub> (16.5A)电流充电至标准充电截止电压，计算充电容量 (Ah) 与初始容量的比值(%)。</p>	<p>-20℃充电容量 ≥ 80%* 初始容量 Charge capacity ≥ 80% * initial capacity at -20 °C</p>
		<p>1. A cell is discharged in accordance with 3.1.3, stored in an ambient temperature of -20±2 °C for 24±0.2h, and then charged to standard charge cut-off voltage at a constant current of 1I<sub>1</sub> (33A). Calculate the ratio of charge capacity and initial capacity (%).</p> <p>2. A cell is discharged in accordance with 3.1.3, stored in an ambient temperature of -40 ±2 °C for 24±0.2h, and then charged to standard charge cut-off voltage at a constant current of 0.5 I<sub>1</sub> (16.5A). Calculate the ratio of charge capacity and initial capacity (%).</p>	<p>-40℃充电容量 ≥ 60%* 初始容量 Charge capacity ≥ 60% * initial capacity at -40 °C</p>
5	低温放电性能 Low Temperature Discharge Performance	<p>电池按 3.1.2 规定充电结束后，将电池放入-20 ±2℃ /-40 ±2℃恒温环境中搁置 24±0.2h，然后以 1I<sub>1</sub> (33A) 电流放电至放电截止电压 1.2V，计算放电容量 (Ah) 与初始容量的比值(%)。</p>	<p>-20℃放电容量 ≥ 70%* 初始容量 Discharge capacity ≥ 70% * initial capacity at -20 °C</p>
		<p>A cell is charged in accordance with 3.1.2, and stored in an ambient temperature of -20±2 °C /-40 ±2 °C for 24±0.2h, and then discharged to 1.2V at a constant current of 1I<sub>1</sub> (33A). Calculate the ratio of discharge capacity and initial capacity (%).</p>	<p>-40 °C 放电容量 ≥ 50%*初始容量 Discharge capacity ≥ 50% * initial capacity at -40 °C</p>

6	常温荷电保持与容量恢复能力 Retention Capability and Capacity recovery at Room Temperature	电池按 3.1.2 规定充电结束后, 将电池在室温环境中搁置 28 天, 然后按 3.1.3 规定放电, 计算放电容量 (Ah) 与初始容量的比值(%). 再按 3.1.2 规定充电, 搁置 10 分钟, 按 3.1.3 规定放电, 计算放电容量 (Ah) 与初始容量的比值(%). A cell is charged in accordance with 3.1.2, stored in an ambient temperature of 25±5 °C for 28 days, then discharged in accordance with 3.1.3. Calculate the ratio of discharge capacity and initial capacity (%). Charged in accordance with 3.1.2, rest 10 minutes, discharged in accordance with 3.1.3. Calculate the ratio of discharge capacity and initial capacity (%).	常温剩余容量≥85%*初始容量, 恢复容量≥95%*初始容量 The residual capacity is not less than 85% of the initial capacity, and the recoverable capacity is not less than 95% of the initial capacity at room temperature
7	55℃荷电保持与容量恢复能力 Retention Capability and Capacity Recovery at 55 °C	电池按 3.1.2 规定充电结束后, 将电池在 55±2℃环境下储存 7 天, 然后按 3.1.3 放电, 计算放电容量 (Ah) 与初始容量的比值(%). 再按照 3.1.2 规定充电, 搁置 10 分钟, 按 3.1.3 放电, 计算放电容量 (Ah) 与初始容量的比值(%). A cell is charged in accordance with 3.1.2, and stored in an ambient temperature of 55 ±2 °C for 7 days, then discharged in accordance with 3.1.3. Calculate the ratio of discharge capacity and initial capacity (%). Charged in accordance with 3.1.2, rest 10 minutes, a discharged in accordance with 3.1.3. Calculate the ratio of discharge capacity and initial capacity (%).	55℃剩余容量≥85%*初始容量, 恢复容量≥95%*初始容量 The residual capacity is not less than 85% of the initial capacity, and the recoverable capacity is not less than 95% of the initial capacity at 55 °C
备注: 测试项目 6 和 7 可任选其一。 Remark: Either 6 <sup>th</sup> or 7 <sup>th</sup> test item could be chosen.			

### 5. 单体电池可靠性测试 Cell Reliability Test

序号 No.	项目 Items	测试方法及条件 Test Method and Conditions	标准 Criteria
1	过放电 Over Discharge	电池按 3.1.2 规定充电结束后, 对电池以 1 I <sub>1</sub> (33A) 电流放电 90min, 观察 1h。 A cell is charged in accordance with 3.1.2, then discharged at a constant current of 1 I <sub>1</sub> (33A) for 90 minutes, observed for 1h.	不爆炸、不起火、不漏液 No explosion, No fire, No leakage



2	过充电 Over Charge	<p>电池按 3.1.2 规定充电结束后, 对电池以 <math>1 I_1(33A)</math> 恒流充电, 至电压达到 4.35V 或充电时间达到 1h, 观察 1h。 A cell is charged in accordance with 3.1.2, then charged to 4.35V or charge time is over 1h at a constant current of <math>1 I_1(33A)</math>, observed for 1h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>
3	短路 Short Circuit	<p>电池按 3.1.2 规定充电结束后, 将电池正、负极经外部短路 10min, 外部线路电阻应小于 <math>5m\Omega</math>, 观察 1h。 A cell is charged in accordance with 3.1.2, then short-circuited by connecting the positive and negative terminals for 10 min with an external line having a maximum resistance of <math>5m\Omega</math>, then observed for 1h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>
4	加热 Heating	<p>电池按 3.1.2 规定充电结束后, 在温度箱中按照 <math>5^\circ C/min</math> 的速率由室温升至 <math>130\pm 2^\circ C</math>, 并保持 30min 后停止加热, 观察 1h。 A cell is charged in accordance with 3.1.2, stored in a temperature box for 30min at the temperature of <math>130\pm 2^\circ C</math> with a heating rate of <math>5^\circ C/min</math>, stopped heating, then observed for 1h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>
5	挤压 Crush	<p>电池按 3.1.2 规定充电结束后, 挤压板 (半径 75mm、长度大于被挤压电池的尺寸的半圆柱体) 以 <math>(5\pm 1) mm/s</math> 的速度垂直于电池极板方向施压, 直至电池电压变为 0V 或变形量达到 30% 或挤压力达到 200kN 后停止挤压, 观察 1h。 A cell is charged in accordance with 3.1.2, crushed by a plate (a half cylinder with the radius of 75mm and length is longer than the cell's) in the vertical direction at a rate of <math>(5\pm 1) mm/s</math> until the voltage drops to 0V or the cell's deformation rate increases to 30% or the pressure increases to 200kN, and then observed for 1h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>

6	<p>针刺 Puncture Test</p>	<p>电池按 3.1.2 规定充电结束后, 用 1 个直径 5mm~8mm 的钢针以 (25±5) mm/s 的速度从垂直于电池极板的方向贯穿电池(靠近所刺面的几何中心), 并把钢针停留在电池内, 观察 1h。 A cell is charged in accordance with 3.1.2, punctured through (near the geometric center of the surface) by a nail which diameter of 3mm at a rate of 25±5 mm/s, the nail stays within the cell, and then observed for 1h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>																																
7	<p>海水浸泡 Seawater Immersion</p>	<p>电池按 3.1.2 规定充电结束后, 将电池完全浸入 3.5%NaCl 溶液中 2h。 A cell is charged in accordance with 3.1.2, completely soaked into the 3.5% NaCl solution for 2h.</p>	<p>不爆炸、不起火 No explosion, No fire</p>																																
8	<p>低气压 Low Pressure</p>	<p>电池按 3.1.2 规定充电结束后, 在室温下将电池放入气压为 11.6kPa 的低气压箱中, 静置 6h 后, 观察 1h。 A cell is charged in accordance with 3.1.2, stored in a case with the low pressure of 11.6kPa at room temperature for 6 hours, then observed for 1h.</p>	<p>不爆炸、不起火、不漏液 No explosion, No fire, No leakage</p>																																
9	<p>温度循环 Temperature Cycling</p>	<p>电池按 3.1.2 规定充电结束后, 放入温度箱中, 温度按照下表进行调节, 循环 5 次后, 观察 1h。 A cell is charged in accordance with 3.1.2, stored in a temperature box, regulating temperature as the following table, observed for 1 h after cycling 5 times.</p> <table border="1" data-bbox="496 1406 1220 1832"> <thead> <tr> <th>温度(°C) Temperature</th> <th>时间增量 (min) Incremental Time</th> <th>累计时间 (min) Total Time</th> <th>温度变化率 (°C/min) Temperature Rate</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>-40</td> <td>60</td> <td>60</td> <td>13/12</td> </tr> <tr> <td>-40</td> <td>90</td> <td>150</td> <td>0</td> </tr> <tr> <td>25</td> <td>60</td> <td>210</td> <td>13/12</td> </tr> <tr> <td>85</td> <td>90</td> <td>300</td> <td>2/3</td> </tr> <tr> <td>85</td> <td>110</td> <td>410</td> <td>0</td> </tr> <tr> <td>25</td> <td>70</td> <td>480</td> <td>6/7</td> </tr> </tbody> </table>	温度(°C) Temperature	时间增量 (min) Incremental Time	累计时间 (min) Total Time	温度变化率 (°C/min) Temperature Rate	25	0	0	0	-40	60	60	13/12	-40	90	150	0	25	60	210	13/12	85	90	300	2/3	85	110	410	0	25	70	480	6/7	<p>不爆炸、不起火、不漏液 No explosion, No fire, No leakage</p>
温度(°C) Temperature	时间增量 (min) Incremental Time	累计时间 (min) Total Time	温度变化率 (°C/min) Temperature Rate																																
25	0	0	0																																
-40	60	60	13/12																																
-40	90	150	0																																
25	60	210	13/12																																
85	90	300	2/3																																
85	110	410	0																																
25	70	480	6/7																																

## 6. 电池使用时危险、警告及注意事项 Danger Warning and Caution in Handling the Cell

### 6.1 推荐事项 Recommending Usage

**6.1.1** 使用电池前，请仔细阅读使用说明书和电池表面标识。

Please read the cell instructions and the label on its surface before use.

**6.1.2** 在使用过程中，应远离热源、高压，避免儿童玩弄电池，切勿摔打电池。

When in use, the cell shall be kept out of heat, high voltage and avoided children's touching. Do not drop the cell.

**6.1.3** 应使用制造商认可的充电器和充电程序，不恰当的充电方式会导致电池发热或损坏。

Use only approved chargers and procedures, improperly charging a cell may cause to flame or damage.

**6.1.4** 切勿将电池正负极短路，切勿自己拆装电池，也勿让电池放在受潮处，以免发生危险。

Do not touch contacts together. Do not demolish or assemble the cell by yourself. Do not put the cell in the damp place.

**6.1.5** 长期不用时，请将电池储存完好，应让电池保持半荷电状态。请用不导电材料包裹电池，以避免金属直接接触电池，造成电池损坏，将电池保存在阴凉干燥处。

When the cell was stored for a long period, put it well in its half capacity. Do not wrap it with conduct material to avoid the damage caused by the direct contact between the metal and cell. Keep the cell in day places.

**6.1.6** 废弃电池请安全妥当处理，不要投入火中或水中。

Safely disposed the disused cell. Do not put it into fire or water.

## **6.2 危险警告 Hazard Warning**

### **6.2.1 禁止拆解电池 Forbid Disassemble Batteries**

自行拆解会造成电池发热、冒烟、变形或燃烧。

Disassemble the battery will cause the battery heat, smoke, deformation or burn.

### **6.2.2 禁止让电池短路 Forbid Short-circuit Batteries**

不要将电池的正负极用金属连接，也不要将电池与金属片放在一起存储和移动。如果电池被短路，将会有超大电流流过，将会损坏电池，造成电池发热、冒烟、变形或燃烧。

Do not connect the cell's positive and negative with metal. Do not put the cell with metal together either storage or movement. If the cell is short circuit, there will be a large current flows through the cell, will cause the battery heat, smoke, deformation or burn and damage the cell.

### **6.2.3 严禁加热和焚烧电池 Forbid Heat and Burn the Cell**

加热和焚烧电池将会造成电池隔离物的熔化、安全功能丧失或电解质燃烧，过热就会使电池发热、冒烟、变形或燃烧。

If heating or burning the cell, it will cause the isolated element in the cell dissolved, protection function stopped or the electrode burning, over heated, which will make the cell heat, smoke, distort or burning.

### **6.2.4 避免在热源附近使用电池 To Avoid Using the Cell near the Heat**

不要在火源、烤炉附近或超过 80℃ 的环境中使用电池，过热将会导致电池内部短路，使电池发热、冒烟、变形或燃烧。

Do not use the cell near the fire, stove, or the environment temperature over 80 °C, and overheating will cause the cell internal short-circuit and make it heat, smoke, distort or burning.

#### 6.2.5 禁止弄湿电池 Forbid Bathing the Cell

不要弄湿电池，更不能将电池投入水中，否则会造成电池内部保护电路和功能丧失及发生不正常的化学反应，电池有可能发热、冒烟、变形或燃烧。

Do not dampen the cell, or even immerse it in the water, which will cause internal protection circuit and its function lost or abnormal chemical reactions, which will lead to heating, smoking, distortion or burning.

#### 6.2.6 使用非专用充电器给电池充电，会发生危险 Danger in Using Non-indicated Chargers to Charge the Cell

不要使用高于本规格书规定的最大电流或电压充电。严禁反充电池（正负极接反）。在非正常的条件下充电会造成电池内部保护电路功能丧失和发生不正常的化学反应，电池有可能发热、冒烟、变形或燃烧。

Do not charge the cell with a current or voltage higher than the specified maximum value in this specification. Prohibit reverse charging of the cell. Charging in abnormal condition, will cause internal protection circuit and its function lost or abnormal chemical reactions, which will lead to heating, smoking, distortion or burning.

#### 6.2.7 禁止破坏电池 Forbid Damage Cell

禁止用金属凿入电池、锤打或摔打电池或其他方法破坏电池，否则会造成电池发热、冒烟、变形或燃烧，甚至会发生危险。

Do not allow damage the cell with the metals gouged, forged or dropped etc., otherwise, it will cause overheating, distort, smoke or burning, even in danger.

#### 6.2.8 禁止在电池主体上直接焊接 Forbid directly welding on the Cell

过热将会造成电池隔离物的熔化、安全保护功能丧失，使电池发热、冒烟、变形或燃烧。

Over-heated will cause the isolated element dissolved in the cell and losing protective function, even will cause overheating, distort, smoke or burning.

#### 6.2.9 不要直接接触及漏液电池 Do not Touch the Leak-out Cell

渗漏的电解液会造成皮肤不适，万一电解液进入眼睛，尽快用清水冲洗，不可揉眼，并迅速送医院处理。

The leak-out electrolyte will cause the skin uncomfortable. If it drops into eyes, do not rub the eyes but wash in time, and go to hospital for treatment immediately.

#### 6.2.10 不要混用电池 Do not Mixed-using Cells

避免将新的和旧的或不同型号、不同规格、不同化学成分的电池配对使用。

Avoid of old and new or different types, different specifications and different chemical composition of the cells matching use.

#### 6.2.11 其它注意事项 Other Warnings

不要将电池放入微波炉、洗衣机或者烘干机里；不要使用已经损坏的电池。

Do not put the cell into microwave, washing machine or drying machine. Do not use a damaged cell.

#### 6.2.12 其它 Others

如不按以上规定操作导致发生意外，本公司不承担相应责任。

GREE Altairnano shall make no liability for problems that occur when the above specifications are not followed.



## 7. 保质期及产品责任 Period of Warranty and Product Liability

电池的保质期：从出厂日期（打码）开始起 180 天。如果有证据表明电池的缺陷是在制造过程中形成的，而不是由于用户滥用及错误使用造成的，本公司负责退换电池，否则本公司不承诺免费更换。

Warranty period of this product is 180 days from manufacturing code. We guarantee to give a replacement in case of cells with defects proven due to the manufacturing process instead of abuse and misuse by the customers, otherwise, GREE Altairnano are not promised free replacement.

## 8. 贮存 Storage

电池应贮存在温度为 $-20^{\circ}\text{C}\sim 45^{\circ}\text{C}$ ，相对湿度 $\leq 90\%$ 的清洁、干燥、通风的环境中，应避免与腐蚀性物质接触，远离火源及热源。并且应使电池处于 50%~60%的荷电状态。如长时间贮存，建议每半年充电一次以防止电池过放电。

The cell shall be stored in the clean and dry ventilation room at the temperature of  $-20^{\circ}\text{C}\sim 45^{\circ}\text{C}$  and the relative humidity  $\leq 90\%$  and shall be kept out of fire or heat and avoid touching corrosion elements. The cell should be stored with 50%~60% charged condition. We recommend that cells should be charged about once per half a year to prevent over-discharge.

## 9. 运输注意事项 Shipment Requirement

电池应在荷电 50%~60%状态下包装成箱进行运输，在运输过程中应防止剧烈振动、冲击或挤压，防止日晒雨淋，应适用汽车、火车、轮船、飞机等普通运输工具。

The cell should be packed in cartons under the condition of 50%~60% charged for shipment. The violent vibration, impaction or squeezing should be avoided in the transport process; Avoid to be exposed to the sun and rain. The cells shall be shipped by normal transportation such as by road, by train, by ocean or by air.

## 10. 其它化学反应 Other Chemical Reactions

电池利用的是化学反应的原理，即使存放很长一段时间不使用，电池的性能也会随时间的增加而降低。如果使用条件如充电、放电及周围环境温度等情形不在指定的使用范围内，会缩短电池的使用寿命，或者会产生漏液导致设备损坏。如果电池长时间不能充电，即使充电方法正确，也需要更换电池了。

Because batteries utilize chemical reaction, cell performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the cell may be shortened or the device in which the cell used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even they are charged correctly, this may indicate it is time to change the cell.

## 11. 免责声明 Disclaimer

如果产品需求单位不按本说明书中的规定进行使用，如果电芯出现任何问题，所有责任由产品需求单位承担，格力钛新能源股份有限公司将不承担任何责任。

如果由于产品需求单位不按本说明书中的规定进行使用，造成社会性影响，并对格力钛新能源股份有限公司的声誉造成影响的，格力钛新能源股份有限公司将会追究产品需求单位的责任。根据对格力钛新能源股

份有限公司造成的影响程度，产品需求单位需向格力钛新能源股份有限公司提供赔偿。

If the users do not use it in accordance with the regulations in this manual, which causes any problems with the batteries, all responsibilities shall be borne by the users, and GREE Altairnano New Energy Inc. will not bear any responsibility.

If the users do not use it in accordance with the requirements in this manual, which causes social impact and affects the reputation of GREE Altairnano New Energy Inc. GREE Altairnano New Energy Inc. will pursue the responsibility of the sample requesting department/company according to the level of influence on GREE Altairnano New Energy Inc., the users shall provide compensation to GREE Altairnano New Energy Inc.

## 12. 电池结构示意图 Scheme of the Cell Structure

详见附图一 See Figure 1 for details

## 13. 备注 Remark

本说明书未包括事项应由双方协议确定。

Any other items which are not covered in this specification shall be agreed by both sides.

附图一 Figure 1



