



CUSTOMER NO:

Specification Approval Sheet

规格确认书

MODEL/型号: 18350 1S1P
(850mAh 3.7V)

Prepared By/Date 编制/日期	Checked By/Date 审核/日期	Approved By/Date 批准/日期

	Signature/签字	Date/日期
Customer Approval 客户确认		
	Company Name/公司名称	
	Company Stamp/公司印章	

Amendment Records/修正记录

Revision 版本	Description/记述	Prepared by 编制	Approved by 批准	Date/日期
A/0	First Publish			

Content/目录

2. Model/型号	Page 4
3.Cell Specification/电芯规格说明	Page 4/5
4. Battery/Cell performance test Criteria/电池性能标准	Page 6
4.1 Appearance inspection by visual/外观目测	Page 6
4.2 Environmental test condition/外界环境条件	Page6
4.3 Electrical characteristics/电气特性	Page 6/7
4.4 Mechanical characteristics/机械特性	Page 7
4.5 Safety performance/安全性能	Page 8
5. Cell initial Dimensions/电芯初始尺寸	Page 9
6 Battery specifications/产品规格	Page 10
7. Pack Dimension/包装尺寸	Page 11
附页.Protection board specifications/保护板规格	Page 12/13
8. CAUTIONS IN USE(谨慎使用)	Page 14
9. Period of Warranty/保质期	Page 14
10. Storage of the Batteries/电池的存放	Page 14
11. Other The Chemical Reaction/其它化学反应	Page 14
12. Note/注释	Page 14

1 Scope/适用范围

This specification is applies to describe the related Battery product in this Specification and the Battery/cell supplied by Great Power Battery Co., Ltd only.

本说明书只适用于描述本规格书中相关的产品以及兴科电池有限公司提供的电池。

2 Model/型号: 18350**3 Cell Specification/电芯产品规格**

No.	Items/项目	Specifications/规格		Remark 备注
1	Nominal Capacity 标称容量	850mAh		0.5C Standard discharge 0.5C 标准放电
2	Minimum Capacity 最小容量	850mAh		
3	Nominal Voltage 标称电压	3.7V		Mean Operation Voltage 即工作电压
4	Delivery voltage 交货电压	3.70~3.9V		Within 10 days from Factory 在出厂10天内
5	Charge Voltage 充电电压	4.2V±0.03V		By standard charge method 标准充电方式
6	Standard charging method 标准充电方式	0.2C constant current,4.2V constant voltage charge to 4.2V,continue charging till current decline to ≤0.01C		0.2C恒流4.2V恒压充至电流≤0.01C,时间约6h(供参考)
7	Charge current 充电电流	0.2C	170mA	Standard charge, charge time about 6h(Ref) 标准充电, 时间约6h(供参考)
		0.5C	425mA	Rapid Charge, charge time about: 2.5h(Ref) 快速充电, 时间约2.5h(供参考)
8	Standard discharging method 标准放电方式	0.5C constant current discharge to3.0V,		0.5C恒流放电至3.0V
9	Cell Internal Impedance 单电芯内阻	≤100mΩ		Internal resistance measured at AC 1KHz after 50% charge 半电态下用交流法测量内阻

3 Cell Specification/产品规格(continuous/续上表)

No.	Items/项目	Specifications/规格		Remark 备注
10	Maximum charge current 最大充电持续电流	1C	850mA	For continuous charging mod 连续充电模式
11	Maximum discharge current 最大放电持续电流	1C	850mA	For continuous discharge mod 连续放电模式
12	Operation Temperature and relative humidity Range 工作温度和湿度范围	Charge/充电	0~45°C 60±25%R.H.	Charge at a very low temperature such as blew 0°C,will be get a lower capacity and reduce cycle life of the battery 低温充电效率会下降,会影响电池使用寿命
		Discharge/放电	-20~60°C 60±25%R.H.	
13	Storage temperature for a long time 长时间储存温度	-20~25°C 60±25%R.H.		Do not storage exceed half year. Must charge once when storage for half year. must charge the battery which with protect circuit when storage for three months. 不可超过半年,达到半年须充电一次 带保护板电池3个月充电一次

4 Battery/Cell performance test Criteria/电池性能标准

4.1 Appearance inspection by visual/外观目测

There shall be no such defect as rust, leakage, which may adversely affect commercial value of battery.

电池外观应没有锈渍、污渍、漏液等影响商业价值的缺陷存在。

4.2 Environmental test condition/外界环境条件

Unless otherwise specified, all test stated in this product specification are conduct at below test condition

所有测试应按以下环境条件进行, 除非特殊指定外。

Temperature: 20°C~25°C

Relative Humidity: 60%±25% R.H.

4.3 Cell Electrical characteristics/电气特性

No	Items/项目	Test Method and Condition/测试方法及条件	Criteria/标准
1	Rated Capacity at 0.5C(Min.) 0.5C最小额定容量	After standard charge, the capacity shall be measured on 0.5C discharge till the voltage discharge to 3.0V, 标准充电后, 放电至3.0V,截止, 测量0.5C放电容量	≥850mAh
	Rated Capacity at 1.0C(Min.) 1.0C最小额定容量	After standard charge, the capacity shall be measured on 1.0C discharge till the voltage discharge to 3.0V, 标准充电后, 放电至3.0V截止, 测量1.0C放电容量	≥820mAh
	Rated Capacity at 2.0C(Min.) 2.0C最小额定容量	After standard charge, the capacity shall be measured on 2.0C discharge till the voltage discharge to 3.0V, 标准充电后, 放电至3.0V 截止, 测量2.0C放电容量	≥800mAh
2	Cycle Life 循环寿命	Charging and discharging battery as blew conditions 0.5C standard charge to 4.2V end-off 0.5C standard discharge to 3.0V cut-off Continuous charge and discharge for 300 cycles ,the capacity will be measure after the300 th cycle 充放电按以下条件: 0.5C标准充电至4.2V, 0.5C标准放电至3.0V, 连续充放电循环300周, 在第300周结束后测量容量	≥80% of initial capacity
3	Capacity retention 容量保持	The battery to be charge in accordance with standard charge condition at 20~25°C, then storage the battery at an ambient temperature 20~25°C for 28 days. Measure the capacity after 30 days with 0.2C at 20~25°C as retention capacity 将电池在20~25°C标准充电后储存在20~25°C的环境中28天 28天后, 测试电池在20~25°C环境下0.2C放电容量作为保持容量	Retention capacity 容量保持 ≥85%

4	Temperature Dependence of discharge capacity (放电温度特性)	<p>Cells shall be charged per 3.3.1 and discharged @0.2 C₅A to 3.0 volts. Except to be discharged at temperatures per Table 3.</p> <p>Cells shall be stored for 3 hours at the test temperature prior to discharging and then shall be discharged at the test temperature. The capacity of a cell at each temperature shall be compared to the capacity achieved at 23 °C and the percentage shall be calculated. .</p> <p>电池按3.3.1规定充电。按表3的温度中放电, 电池必须先在试验温度中放置3个小时。</p>	Each cell shall meet or exceed the requirements of Table 3 温度中的放电容量应不小于表3的要求
---	---	--	---

Table 3 (表3)

Discharge Temperature (放电温度)	-20°C	-10°C	0°C	23°C	60°C
Discharge Capacity (0.2 C ₅ A) (放电容量/0.2 C ₅ A)	40%	50%	80%	100%	95%


4.4 Mechanical characteristics/机械特性

No	Items/项目	Test Method and Condition/测试方法及条件	Criteria/标准
1	Free fall test 自由跌落测试	<p>The battery to be fully charged in accordance with standard charge condition, then drop the battery three times from a height of 1,0 m onto a concrete floor. The batteries are dropped so as to obtain impacts in random orientations.</p> <p>电池按照标准充电条件充满电, 然后从1m高度跌落电池到一个水泥地面, 随机跌落三次。</p>	No Fire, 不起火, 不爆炸
2	Vibration test 振动测试	<p>After standard charging, fixed the cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 1.6mm. The cell shall be vibrated for 30 minutes per axis of XYZ axes.</p> <p>将标准充电后的电芯固定在振动台上, 沿X、Y、Z三个方向各振动30分钟, 振幅1.6mm, 振动频率为10Hz~55Hz, 每分钟变化1Hz。</p>	No explosion ,No leakage, No fire 无泄漏,不起火, 不爆炸

4.5 Safety performance/安全性能

No	Items/项目	Test Method and Condition/测试方法及条件	Criteria/标准
1	Thermal exposure test 高温热冲击测试	Each fully charged cell, stabilized at room temperature, is placed in a circulating air-convection oven. The oven temperature is raised at a rate of $5\text{ }^{\circ}\text{C}/\text{min} \pm 2\text{ }^{\circ}\text{C}/\text{min}$ to a temperature of $130\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$. The cell remains at this temperature for 10 min before the test is discontinued. 充满电的电池温度稳定到常温后, 放置入循环空气烘箱里, 从常温以 $5\text{ }^{\circ}\text{C}/\text{分} \pm 2\text{ }^{\circ}\text{C}/\text{分}$ 的速率升至 $130\text{ }^{\circ}\text{C}$ 后, 在 $130\text{ }^{\circ}\text{C}$ 放置10分钟	No explosion, No fire 无起火,无爆炸
2	Short test 短路测试($20\text{ }^{\circ}\text{C}$)	The fully charged battery is to be short-circuited by connecting the positive and negative terminals of the battery with resistance load not exceed $100\text{m}\Omega$. Tests are to be conducted at room temperature $20\sim 25\text{ }^{\circ}\text{C}$. 在室温 $20\sim 25\text{ }^{\circ}\text{C}$ 把充满电的电池的正负极用不超过 $100\text{m}\Omega$ 的负载连接起来, 连接起来使电池外部短路	No explosion, No fire The Temperature of the Battery surface not exceeded than $150\text{ }^{\circ}\text{C}$ 无起火,无爆炸 电池表面温度不超过 $150\text{ }^{\circ}\text{C}$
3	Short test 短路测试($60\text{ }^{\circ}\text{C}$)	The fully charged battery is to be short-circuited by connecting the positive and negative terminals of the battery with resistance load not exceed $100\text{m}\Omega$. Tests are to be conducted at room temperature about $60\sim 65\text{ }^{\circ}\text{C}$ 在室温约为 $60\sim 65\text{ }^{\circ}\text{C}$ 把充满电的电池的正负极用不超过 $100\text{m}\Omega$ 的负载连接起来, 连接起来使电池外部短路	No explosion, No fire The Temperature of the Battery surface not exceeded than $150\text{ }^{\circ}\text{C}$ 无起火,无爆炸 电池表面温度不超过 $150\text{ }^{\circ}\text{C}$
4	Forced discharge test 过放电测试	A discharged cell is subjected to a reverse charge at 1C for 90 min. 将电芯放完电, 再用 1C 反接充电90分钟	No explosion, No fire 无起火,无爆炸
5	Over charge test 过充电测试	After standard charge, continue to charge with a constant voltage $3\text{C}/10\text{V}$ per a cell, holding 8h. 电芯标准充满电后, 以 $3\text{C}/10\text{V}$ 的恒定电压继续充电, 保持8小时	No explosion, No fire 无爆炸, 无起火

5 Cell initial Dimensions/电芯初始尺寸

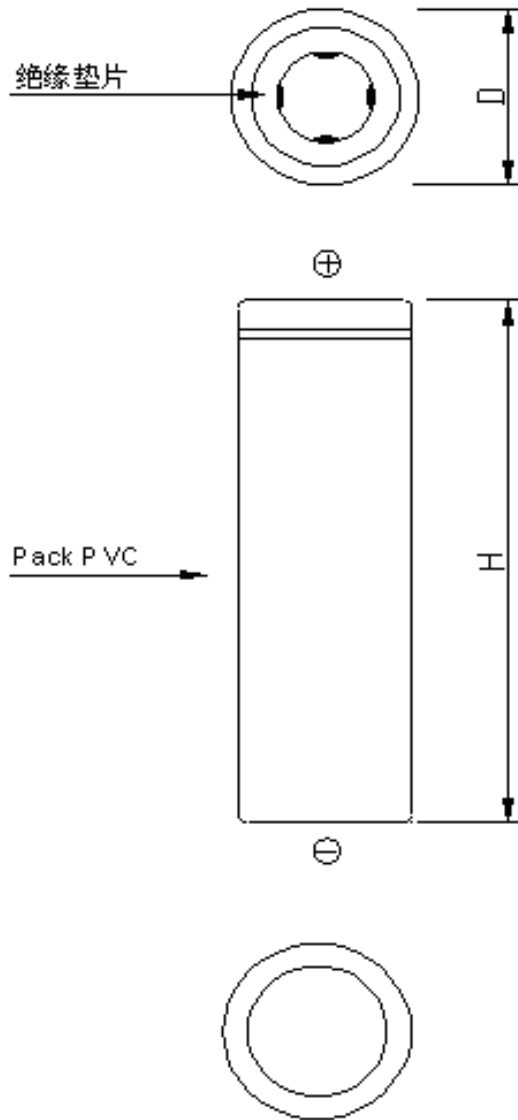


NO	Items	Units: mm
1	diameter/直径(D)	18.3±0.2
3	Height/高度(H)	35.2±0.2

Draw/制图	Checked/审核	Approved/批准

6 Battery specifications/产品规格

No.	Items/项目	Specifications/规格	Remark 备注
1	Capacity for assembled cell discharging by 0.2C 电芯组装后0.2C标准放电的容量	≥850mAh	Standard discharging method 标准放电方式
2	Battery Voltage 电池电压	3.7-3.9V	Delivery Voltage, Within 10 days from Factory 交货电压, 在出厂10天内
3	Standard charge condition 标准充电条件	Charge with 0.2C constant current and 4.2V constant voltage, charge to 4.2V, continue charging till current decline to ≤0.01C 充电电流用0.2C恒流, 4.2V恒压充至电流≤0.01C	Charge voltage: 4.2V±0.02V Charge current:0.2C 充电电压:4.2V±0.02V 充电电流:0.2C
4	Standard discharging method 标准放电方式	0.2C constant current discharge to 3.0V,	0.2C恒流放电至3.0V
5	Internal Impedance 内阻	Assemblage Impedance 装配后内阻≤200mΩ	Measure the Red and black wire of the connector after assembling. 装配后测试电池插头红黑线

7 Battery Pack Dimensions/电池组尺寸

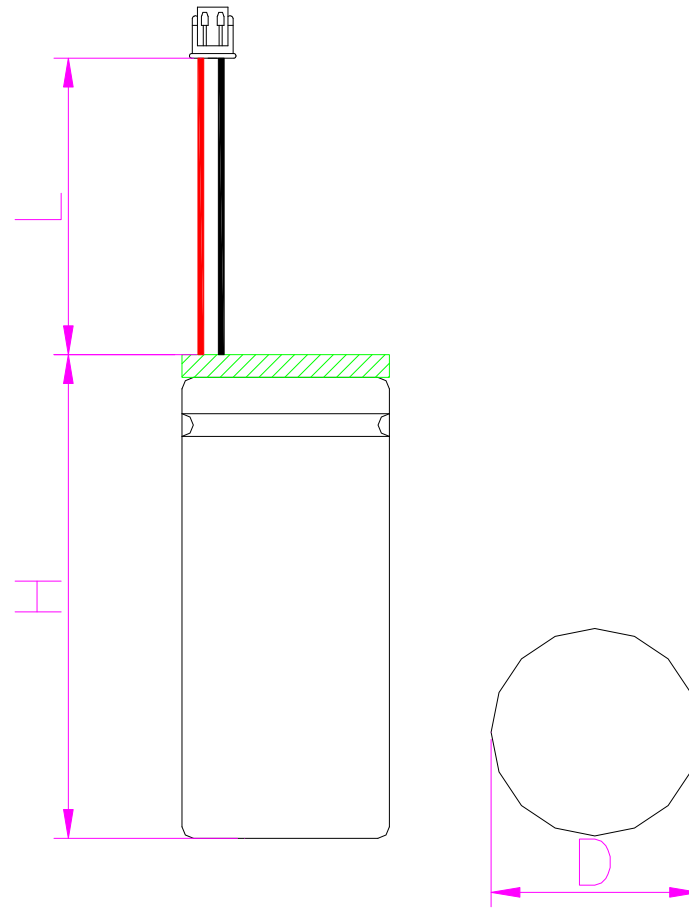

NO	Items	Units: mm		Remark
1	Diameter/直径	D	19	Max.
2	Height/长度	H	40	Max
3	Cable Length/引线长度	L	50±5	

NO	Part name/名称	Quantity/数量	Unit/单位	Remark
1	Cell/电芯	1	ea	XKTD
2	Solder/焊锡	0.04	g	Lead Free
3	PCM	1	Ea	LiD17AD
4	Wire/导线	2	Ea	UL1571/26AWG
5	Connector/插头	1	Ea	Molex51021-2P正向

附页:保护板参数

1. 技术规格specification

1适用范围using scope: 本规格书适用于由本公司所设计生产的LiD17AD锂电保护板。

2电池容量battery capacity:(客户选择)

3环保要求environment request:ROSH

4功能描述function description: 过充保护, 过放保护, 过流保护, 短路保护

5技术参数electric features:

环境温度:25 °C

保护IC	MM3280H01NRH	技术参数parameter value			
项目名称 Item name	最小值 min	典型值 type	最大值 max	单位unit	
过充保护电压 Over-charge Threshold Voltage	4.255	4.275	4.295	V	
过充保护恢复电压 Released voltage from Over-charge	4.145	4.175	4.205	V	
过放保护电压 Over-discharge Threshold	2.965	3.000	3.035	V	
过放保护恢复电压 Released Voltage from Over-discharge	3.100	3.200	3.300	V	
放电过流检测电压 Excess discharge-current threshold	0.140	0.150	0.160	V	
放电过流保护电流 excess discharge-current detect current	2.5	3.8	5.5	A	
过充电检测延迟时间 Output Delay of Over-charge	0.8	1.0	1.2	s	
过放电检测延迟时间 Output Delay of Over-discharge	100	125	150	ms	
过电流检测延迟时间 Output delay of excess discharge-current	9.6	12	14.4	ms	
短路保护延迟时间 Delay Time for Short Protection	280	400	560	μs	
正常状态下静态电流 Supply Current	-	3.0	6.0	μA	
过放状态下静态电流 Standby Current	-	0.2	0.5	μA	
导通内阻 Impedance Resistance of operation	-	-	70	mΩ	
输入电压(B+与B-间) Supply Voltage	-0.3	-	12	V	
最大持续充电电流 Max charge-current	-	-	2.0	A	
最大持续放电电流 Max discharge-current	-	-	2.0	A	
工作温度 Operating Temperature	-40	-	+85	°C	
推荐贮存条件 Storage Temperature	-55	-	+125	°C	
0V电池充电功能 for 0V Charging	-	可能	-		


6可靠性测试

- 恒温恒湿测试Humidity test : +40±2 °C 90%RH 48Hours 高温测试High temperature test : +55±2 °C 2Hours
- 低温测试Low temperature test : -20±2 °C 16Hours


ESD抗静电测试ESD test : Normal operation in all parts at ±4KV (contact) ±8KV (AIR) condition

2. 电气原理Circuit diagram

2.1 电气原理图circuit diagram

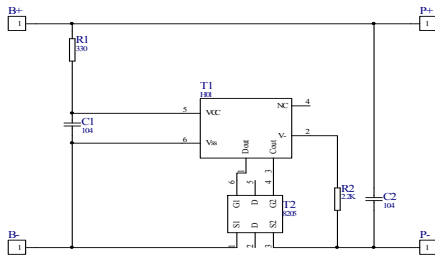

2.2 PCB图 PCB layout

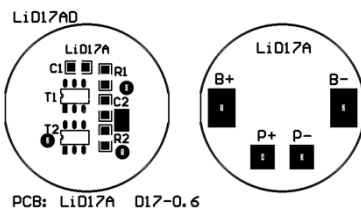

3. 物料清单parts list

序号 No.	物料名称 description	供应商 vendor	代号 symbol	规格/型号 Spec./model	单位 unit	数量 Q'ry
1	PCB板			LID17A	pcs	1
2	电阻Res		R1	330/0603	pcs	1
3	电阻Res		R2	2.2K/0603	pcs	1
4	电容Cap		C1C2	104/0603	pcs	2
5	IC		T1	G3J	pcs	1
6	MOS		T2	8205/ SOT23-6	pcs	1

9 CAUTIONS IN USE(谨慎使用)

To ensure proper use of the battery please read the manual carefully before using it.
(为确保正确使用电池, 使用前请仔细阅读本细则)

. Handling(电池操作)

- Do not expose to, dispose of the battery in fire.(不要靠近和放置电池于火中)
- Do not put the battery in a charger or equipment with wrong terminals connected.
(在充电器或设备仪器中不要把电池接错电极)
- Avoid shorting the battery(避免电池短路)
- Avoid excessive physical shock or vibration.(避免电池过多的物理撞击和震动)
- Do not disassemble or deform the battery.(不要解剖和使电池变形)
- Do not immerse in water.(不要把电池浸泡在水中)
- Do not use the battery mixed with other different make, type, or model batteries.
(不要和其它不同类型的电池混和使用)
- Keep out of the reach of children.(放置电池于儿童不易接触的地方)

. charge and discharge(充电和放电)。Battery must be charged in appropriate charger only.
(电池必须用适当的充电器充电)

- Never use a modified or damaged charger.(不要使用改装或损坏的充电器)
- Do not leave battery in charger over 24 hours.(不要把电池放置于充电器超过24h)

. storage(储存): Store the battery in a cool, dry and well-ventilated area.(应把电池置于凉爽、干燥及通风良好的区域)

. disposal(电池处理)

- Regulations vary for different countries. Dispose of in accordance with local regulations.(电池处理要符合当地的规定)

10 Period of Warranty/保质期

The period of warranty is one year from the date of shipment. Great Power guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customer abuse and misuse.

电池的保质期从出货之日算起为一年。如果电池的缺陷是在制造过程中形成的而不是由于用户滥用及错误使用造成, 本公司负责退换电池。

11 Storage of the Batteries/电池的存放

The batteries should be stored at room temperature, charged to about 30% to 50% of capacity.

We recommend that batteries be charged about once per half a year to prevent over discharge.

电池应当在室温下存放, 应充到30%至50%的电量。如长时间储存, 建议每半年充一次电以防止电池过放电。

12 Other The Chemical Reaction/其它化学反应

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

由于电池是利用化学反应的原理, 所以随时间的增加电池的性能会降低, 即使是存放很长一段时间而不使用。如果使用条件如充电、放电及周围环境温度等情形不在指定的使用范围内, 会使缩短电池的使用寿命, 或者会产生漏液导致设备损坏。如果电池长周期不能充电, 即使充电方法正确, 这样需要更换电池了。

13 Note/注释

Any other items which are not covered in this specification shall be agreed by both parties.

本说明书未包括事项应由双方协议确定。